

LNEYA[®]



Low Temp. **CHILLERS** LN Series

Temp. control $-60^{\circ}\text{C} \sim -10^{\circ}\text{C}$




Color Touch Screen
Large touch screen
Curved form shows
real-time temp. changes



Brand Compressor
Adopt brand compressor,
Expansion valve combined
with control to ensure stable
temperature



Circulating Pump
With magnetic pump, no
mechanical shaft seal
Solve the problem of
circulating pump leakage

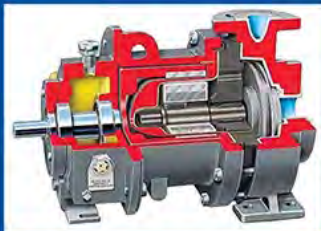

Totally Closed Loop

Low temp. does not absorb water in the air
Ensure the purity of the medium



Security Alarm

Self-diagnosis of security functions
Timely alarms are displayed



Wide Temp. Control

Medium-sized single-fluid temp. control
Temp. control range $-150^{\circ}\text{C} \sim -5^{\circ}\text{C}$



Curve Temp. Control

Automatic control, temp. curve display
Support temp. record U disk export

Typical Applications



- High pressure reactor cold source
- Double glass reactor cold source
- Double layer reactor cold source
- Microchannel reactor cold source
- Small cold source low temperature
- Distillation system low temperature
- Low temp. weathering test of materials
- Combined chemical cold source
- Semiconductor equipment cooling
- Vacuum chamber refrigeration




Plate Heat Exchanger
Heat exchanger to improve the heat exchange efficiency per unit area



Temperature Control
Continuously adjust PID parameters
Gives better control over temperature and response time



Communication Interface
Standard PT100
USB interface
RS485
Optional
Various analog interfaces
Ethernet interface

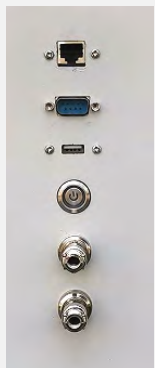

LN Series

Model	LN6W	LN10W	LN15W	LN20W	LN30W	LN40W	LN60W	LN90W	LN120W	LN180W
Temp. Range	-60°C~-10°C									
Cooling Capacity at -40°C	12kW	20kW	30kW	40kW	60kW	80kW	120kW	180kW	240kW	360kW
	10320 kcal/h	17200 kcal/h	25800 kcal/h	34400 kcal/h	51600 kcal/h	68800 kcal/h	103200 kcal/h	154800 kcal/h	206400 kcal/h	309600 kcal/h
Circulation Pump Info	6.6m ³ /h 1.2bar	9m ³ /h 1.2bar	15m ³ /h 2.5bar	15m ³ /h 2.5bar	25m ³ /h 2.5bar	25m ³ /h 2.5bar	25m ³ /h 2.5bar	35m ³ /h 2.5bar	35m ³ /h 2.5bar	50m ³ /h 2.5bar
Inlet&outlet connection size	DN-25	DN-32	DN-40	DN-40	DN-50	DN-50	DN-50	DN-65	DN-65	DN80
Cooling Water At 30 degree	10m ³ /h DN40	14m ³ /h DN40	20m ³ /h DN50	25m ³ /h DN65	30m ³ /h DN80	35m ³ /h DN80	50m ³ /h DN100	70m ³ /h DN125	90m ³ /h DN150	120m ³ /h DN150
Cold Storage tank (optional)	200L	350L	500L	750L	1000L	1200L	1500L	2200L	3000L	4000L
Expansion tank (standard)	100L	175L	250L	350L	500L	600L	750L	1000L	1350L	1800L
Compressor	Emerson Copeland、Dorin semi-closed compressor、Carlyle									
Safety Protection	Plate heat exchanger									
Refrigerant	R404A /R507C									
Secondary refrigerant	Non-corrosive liquid, aqueous ethanol solution, aqueous glycol solution, etc.									
Safety Protection	High pressure protect; water supply cut-off protection; over-current protection; leakage protection; sequential and phase failure protection; High temperature protection; Sensor Failure protection etc. multi-safety protection									
Level Indicator	Adopt glass liquid level indication									
Piping material	Expansion tank, cold storage tank and circulation pipeline are all made of SUS304									
Case material	Channel steel + square tube + cold rolled plate sealing plate Spray									
Operation Panel	7-inch color touch screen display, temperature curve record									
Control System	PLC&Module									
Circulation Pump	LNEYA Mangetic Pump									
Evaporator	Casing type water-cooled condenser / tube-type water-cooled condenser									
Condenser	AORI plate heat exchanger									
Refrigeration accessory	Oil separators, drying filters, mirrors, etc. use Emerson/Danfoss and other brands									
Electric	AC contactors, intermediate relays, circuit breakers, etc. are Schneider / ABB brand									
Closed Circulation System	The whole system is a full closed circulation, there is no oil mist at high temperature and no water vapor at low temperature, pressure do not rise up when system is running. The system will supplement oil automatically at low temperature									
Dimension cm	100*150 *185	200*145 *205	200*145 *205	250*145 *225	250*145 *225	300*160 *225	350*160 *205	400*160 *225	500*200 *225	650*200 *225
Power max 380V 50HZ	14kW	18kW	26kW	35kW	52kW	69kW	104kW	152kW	200kW	300kW
dB	within 75 dB		within 80 dB			within 90 dB				
Weight(kg)	850kg	1000kg	1200kg	1450kg	2000kg	2400kg	3000kg	3600kg	4200kg	5600kg
Throttle type	Electronic expansion valve									



Wuxi Guanya Refrigeration Technology Co., Ltd. (LNEYA) specialized in the Industrial Chiller, Industrial Refrigerator, Multi-reactor Chiller (TCU), Battery Motor / Semiconductor Temperature Testing System and Ultra-low Temperature Chiller. Used in pharmaceutical, aerospace, semiconductor, new energy automotive battery / motor and other industries.

About Us

The company is at the advanced level in the same industry in the research and development of single-machine cascade refrigeration technology, and the research on high and low temperature rapid temp. rise and temperature technology is at the international advanced level. In particular, the high-precision temp. control of the reactor is an internationally advanced single medium control $-90\sim+250^{\circ}\text{C}$ continuous temperature control, and high precision linear control of the reactor material temp.



300 million
Annual sales



15 years
R&D experience